




Shielded Cooling Fan Vents

Shielded Cooling Fan Vents

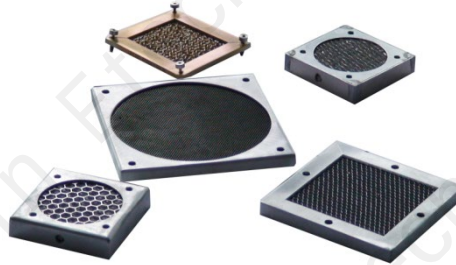

1. Product Description

Our Shielded Cooling Fan Vent provides effective EMI shielding while ensuring maximum airflow. It is easy to install on fans, and we offer standard products designed to meet the specifications of various fan models.

2. Typical Applications

- Base station
- Network cabinets
- Shielded room
- Shielded cabinets

3. Product Features

- Wide Choice of materials and surface treatment.
- Standard mounting gaskets are Monel wire mesh and neoprene sponge environmental gaskets.

4. Technical Data

Frame

- Frame Code: 50, Aluminum Alloy 3003, Thickness 0.375 in.(0.95mm)
- Frame Code: 51, Thickness 0.625 in.(15.9mm)
-


Honeycomb Core cell

- Honeycomb Cell 1/16 in.(1.6mm) * Thickness 0.25 in.(6.35mm)
- Honeycomb Cell 1/8 in.(3.2mm) * Thickness 0.5 in.(12.7mm)

Surface treatment

- Clear chromate coating
- Tin plated

5. Outline Drawing (mm)

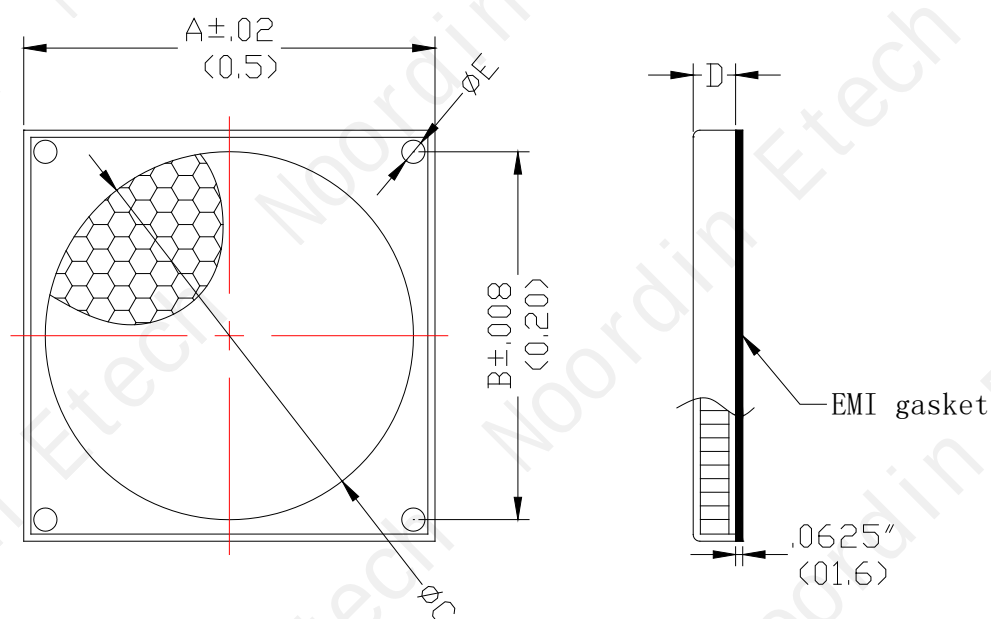

Fans Code	A	B	C	E	SEQUENTIAL XXXX
25mm	0.984(25)	0.787(20)	0.787(20)	0.125(3.2)	0025
30mm	1.18(30)	0.787(20)	0.984(25)	0.157(4)	0030
40mm	1.575(40)	1.260(32)	1.378(35)	0.157(4)	0040
50mm	1.969(50)	1.575(40)	1.772(45)	0.157(4)	0050
60mm	2.362(60)	1.969(50.0)	2.0(50.8)	0.204(5.2)	0060
80mm	3.150(80)	2.815(71.5)	2.875(73.03)	0.204(5.2)	0080
92mm	3.63(92.2)	3.248(82.55)	3.25(82.55)	0.204(5.2)	0092
120mm	4.88(124)	4.134(105)	4.5(114.3)	0.204(5.2)	0120
140mm	5.5(139.7)	4.9(124.46)	5.315(135)	0.204(5.2)	0140

Contact Us

No. 11 Shunyuan Road, Xinbei District, Changzhou, Jiangsu Province, China

+86 0519 86815058

sales@noordin.cn, cyt@noordin.cn, bjw@noordin.cn